

TIRES


The ATC-70 is equipped with 16 × 8-7, low pressure, tubeless tires. These tires are designed specifically for off-the-road use. Paved surfaces should be avoided since they will cause excessive tire wear.

For normal use, the tires should be inflated to a maximum pressure of 3.0 psi. A manually operated tire pump should be used rather than the high pressure systems found in service stations. This will lessen the chance of inadvertently damaging the tires through over-inflation.

Be especially careful to inflate both rear tires equally. If the ATC-70 is operated with unequal tire pressures, the resultant difference in tire circumference will cause the ATC-70 to tend to run toward one side and will affect handling

adversely.

Recommended pressure:
0.2 kg/cm² (3.0 psi)

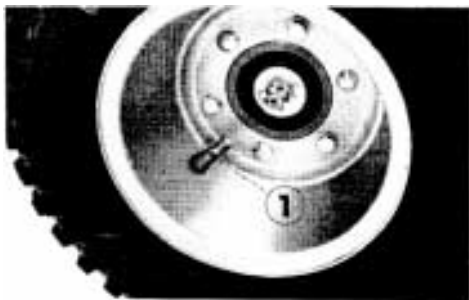

① Tire valve