


4. Open the battery cover (6).
5. Pull out the battery and check the electrolyte. The electrolyte level must be maintained between the UPPER (7) and LOWER (8) LEVEL marks on the side of the battery.
6. If the electrolyte level is low, remove the battery filler caps (9).

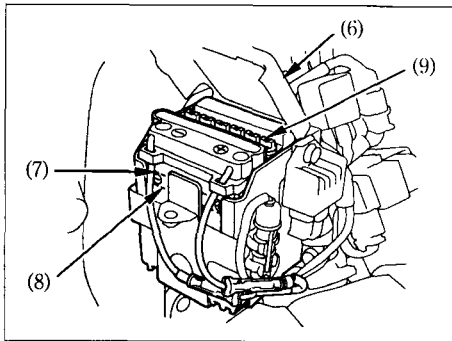

- (6) Battery cover
- (7) UPPER LEVEL mark
- (8) LOWER LEVEL mark
- (9) Filler caps