

LOWER COWL CB1300S/SA


The lower cowl must be removed to remove the left side cowl or replace the position light bulb (except U type).

Removal:

1. Remove the clips (1).
2. Remove the bolts (2).
3. Remove the lower cowl (3).

Installation:

- Installation can be done in the reverse order of removal.

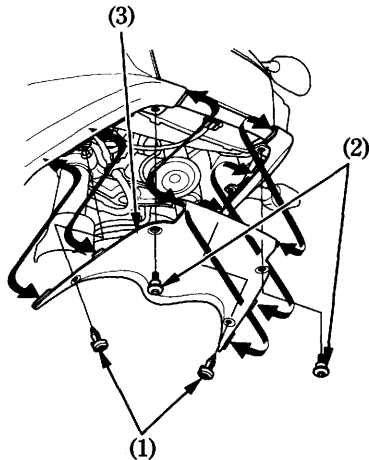

- (1) Clips
- (2) Bolts
- (3) Lower cowl