


the **SAE J1703** specification. Outside the U.S.A., Use **SAE J1703** brake fluid. Reinstall the diaphragm and tighten the reservoir cap securely.


3. Bleeding The Brake System

The brakes must be bled with great care subsequent to work performed on the brake system, when the lever becomes soft or spongy or when lever travel is excessive. This procedure is best performed by two mechanics.

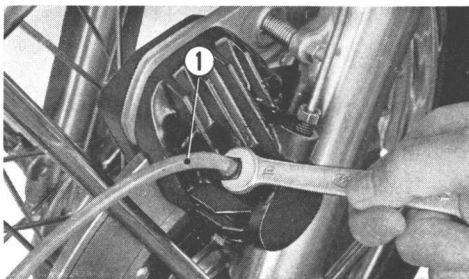

① Bleeder hose

- Remove the dust cap from the bleeder valve and attach bleeder hose ①.
- Place the free end of the bleeder hose into a glass container which has some hydraulic brake fluid in it so that the end of the hose can be submerged.
- Fill the reservoir with only the recommended brake fluid. Screw the cap partially on the reservoir to prevent entry of dust.
- Rapidly pump the brake lever several

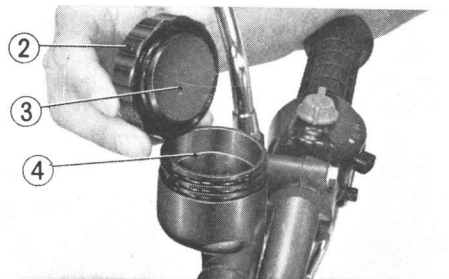

② Reservoir cap
③ Diaphragm

④ Level line