


4. Remove the hex bolts A (4) and hex bolt B (5).

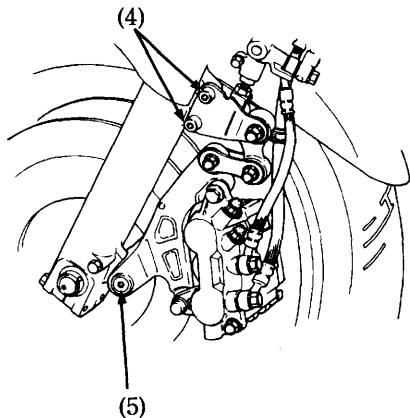


(4) Hex bolts A

(5) Hex bolt B

5. Remove the left caliper assembly (6).

NOTE:

- * Do not depress the brake lever when the wheel is off the motorcycle. The caliper pistons will be forced out of the cylinders with subsequent loss of brake fluid. If this occurs, servicing of the brake system will be necessary. See your authorized Honda dealer for this service.

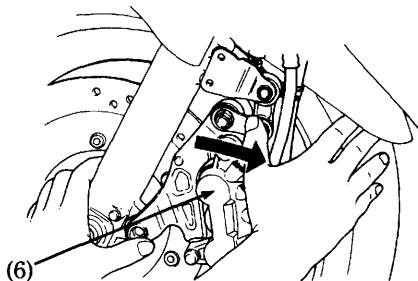

(6) Left caliper assembly