


4. Remove the left caliper assembly (4).
Remove the right caliper assembly (5)
from the fork leg by removing the fixing
bolts (6).

CAUTION:


- To avoid damage to the brake hose,
support the caliper assembly so that
it doesn't hang from the hose. Do not
twist the brake hose.

NOTE:

- Do not depress the brake lever and brake
pedal when the wheel is off the
motorcycle. The caliper piston will be
forced out of the cylinder with
subsequent loss of brake fluid. If this
occurs, servicing of the brake system
will be necessary. See your authorized Honda
dealer for this service.

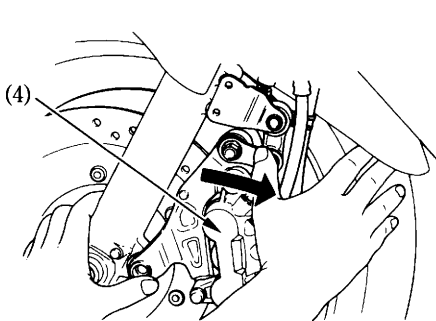

(4) Left caliper assembly

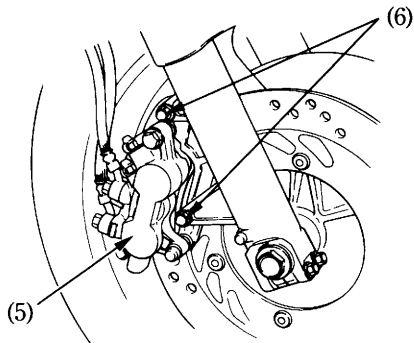

(5) Right caliper assembly

(6) Fixing bolts