


3. Remove the bolts C (4).
4. Remove the clip B (5) and clip C (6).
5. Remove the bolts D (7).
6. Release the prong (8) of the right lower cowl (9) from the grommet and remove the right lower cowl.
7. Remove the bolts E (10).
8. Release the prong (11) of the left lower cowl (12) from the grommet and remove the left lower cowl.
9. Remove the clip D (13).
10. Release the prongs (14) of the inner half cowl (15) from the frame grommets and remove the inner half cowl (15).

Installation:

- Installation can be done in the reverse order of removal.

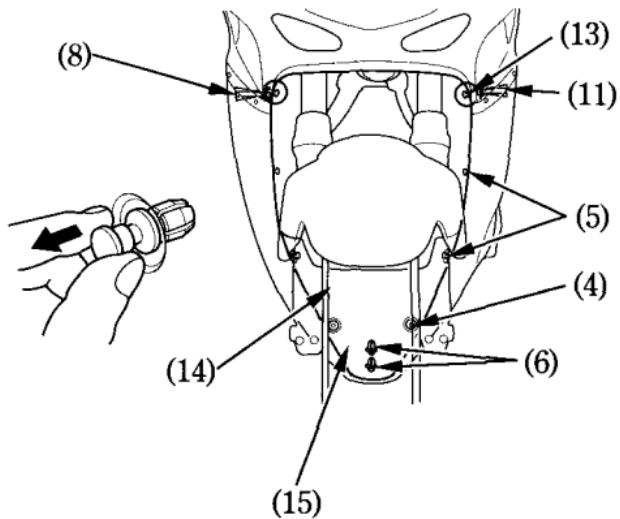

(4) Bolt C	(8) Prong	(13) Clip D
(5) Clip B	(11) Prong	(14) Prong
(6) Clip C		(15) Inner half cowl