

Engine Oil & Strainer Screen


Engine Oil Strainer Screen

Refer to *Safety Precautions* on page 70 .

1. Park the scooter on its center stand on a firm, level surface.
2. If the engine is cold, start it and let it idle for 3–5 minutes. Turn the engine off. Wait 2–3 minutes for the oil to settle.
3. Place a drain pan under the engine oil drain plug (1).
4. To drain the oil, remove the oil filler cap/dipstick (2), engine oil drain plug, spring (3) and oil strainer screen (4).

RIGHT SIDE

CRANKCASE

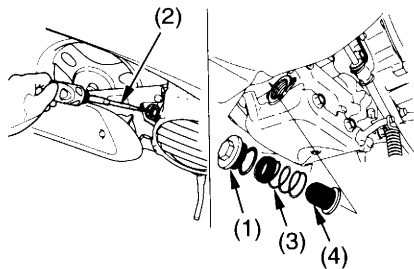

- (1) engine oil drain plug
- (2) oil filler cap/dipstick
- (3) spring
- (4) oil strainer screen