


Torque Specifications

Frame

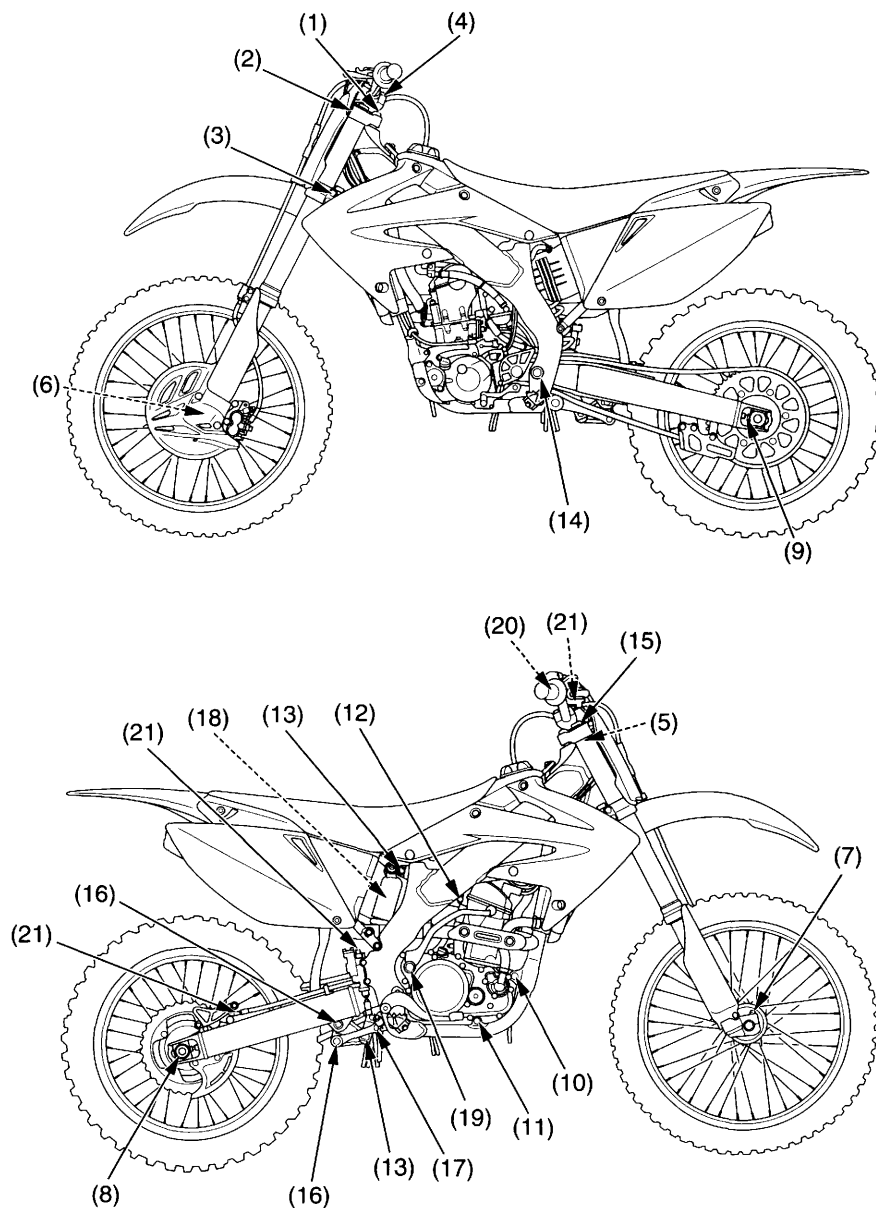

Item	Torque			Remarks		
	N•m	kgf•m	lbf•ft			
FRAME						
1	Steering stem nut	108	11.0	80		
2	Fork bridge upper pinch bolts	22	2.2	16		
3	Fork bridge lower pinch bolts	20	2.0	15		
4	Handlebar upper holder bolts	22	2.2	16		
5	Handlebar lower holder nuts	44	4.5	32		
6	Front axle nut	88	9.0	65		
7	Front axle pinch bolts	20	2.0	15		
8	Rear axle nut	128	13.1	94	NOTE 1	
9	Chain adjuster lock nuts	27	2.8	20	NOTE 2	
10	Front engine hanger bracket nut	64	6.5	47		
11	Lower engine hanger bracket nut	64	6.5	47		
12	Upper engine hanger plate nuts	(engine side)	54	5.5	40	
		(frame side)	34	3.5	25	
13	Shock absorber	44	4.5	32	NOTE 1	
14	Swingarm pivot nut	88	9.0	65	NOTE 1	
15	Fork	(fork damper)	34	3.5	25	
		(fork cap)	30	3.1	22	
16	Rear shock arm nuts	(swingarm side)	53	5.4	39	NOTE 1, 3
		(shock link side)	53	5.4	39	NOTE 1, 3
17	Rear shock link nuts (frame side)	53	5.4	39	NOTE 1, 3	
18	Shock spring lock nut	44	4.5	32		
19	Kickstarter arm bolt	38	3.9	28		
20	Front brake master cylinder holder bolts	9.9	1.0	7.3		
21	Brake hose bolts	34	3.5	25		

NOTES: 1. U-nut.
 2. UBS nut.
 3. Apply oil to the threads and flange surface.
 4. Alock bolt.
 5. Apply locking agent to the threads.