


Torque Specifications

Frame

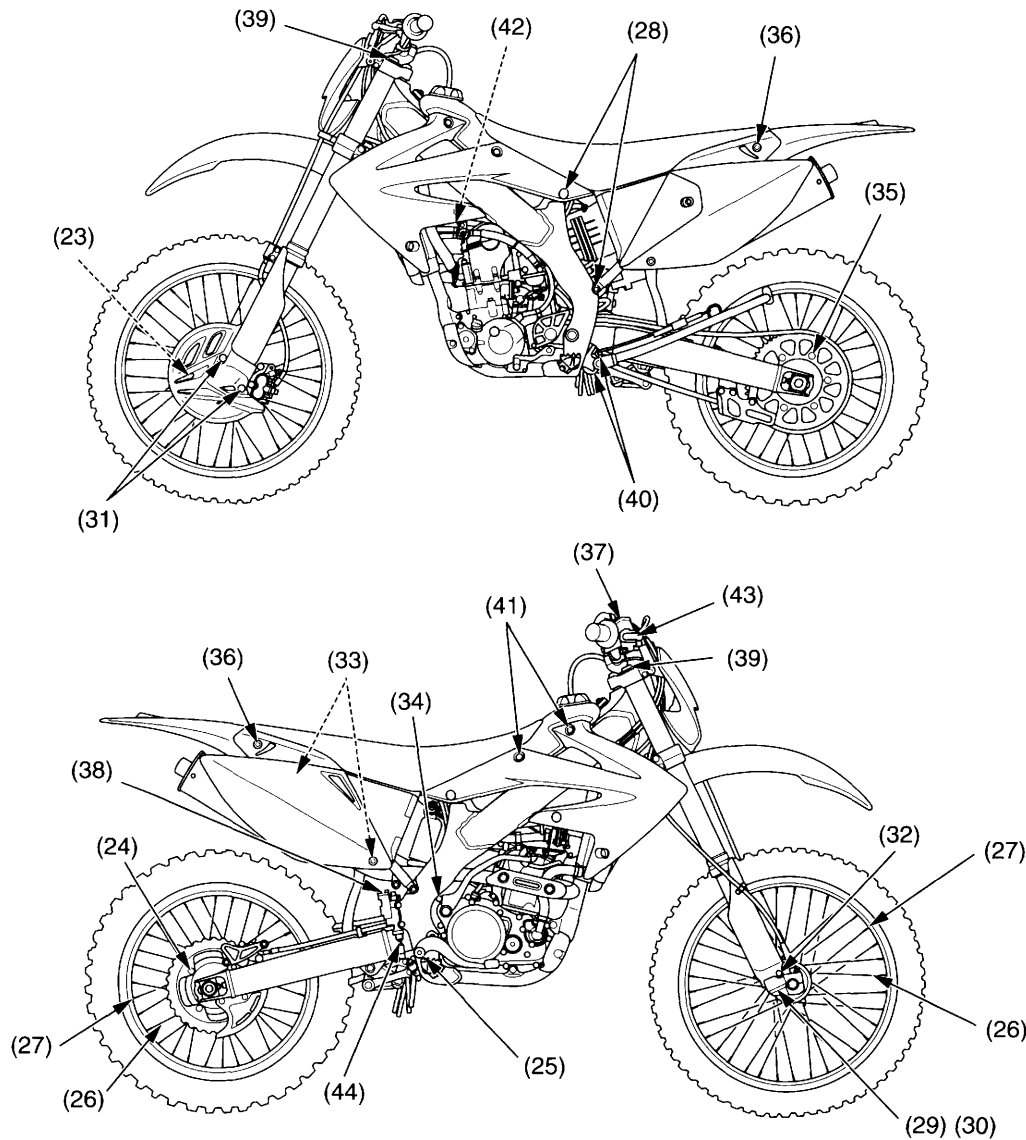

FRAME

	Item	Torque			Remarks
		lbf•ft	N•m	kgf•m	
23	Front brake disc nuts	12	16	1.6	NOTE 2
24	Rear brake disc nuts	12	16	1.6	NOTE 2
25	Rear brake pedal pivot bolt	27	36	3.7	
26	Spokes	2.7	3.68	0.4	
27	Rim locks	9	12	1.2	
28	Subframe (upper) mounting bolts	22	30	3.1	
	(lower)	36	49	5.0	
29	Fork center bolt	51	69	7.0	
30	Fork center bolt lock nut	16	22	2.2	
31	Disc cover bolts	10	13	1.3	
32	Fork protector bolts	5.2	7	0.7	NOTE 4
33	Muffler mounting bolts (front)	19	26	2.7	
	(rear)	19	26	2.7	
34	Muffler clamp bolt	15	21	2.1	
35	Driven sprocket nuts	24	32	3.3	NOTE 2
36	Seat mounting bolts	19	26	2.7	
37	Front brake reservoir cap screws	0.7	1.0	0.1	
38	Rear brake reservoir cap bolts	0.7	1.0	0.1	
39	Fork air pressure release screw	0.9	1.2	0.1	
40	Side stand mounting bolts (upper)	40	54	5.5	
	(lower)	29	39	4.0	
41	Shroud B bolts	3.7	5	0.5	
42	Fuel joint bolts	7	10	1.0	
43	Brake lever adjuster lock nut	4.4	5.9	0.6	
44	Brake pedal adjuster lock nut	4.4	5.9	0.6	

- NOTES:
1. Apply oil to the threads and flange surfaces.
 2. U-nut.
 3. UBS nut.
 4. A lock bolt: Replace with a new one.