


# Torque Specifications

## Frame

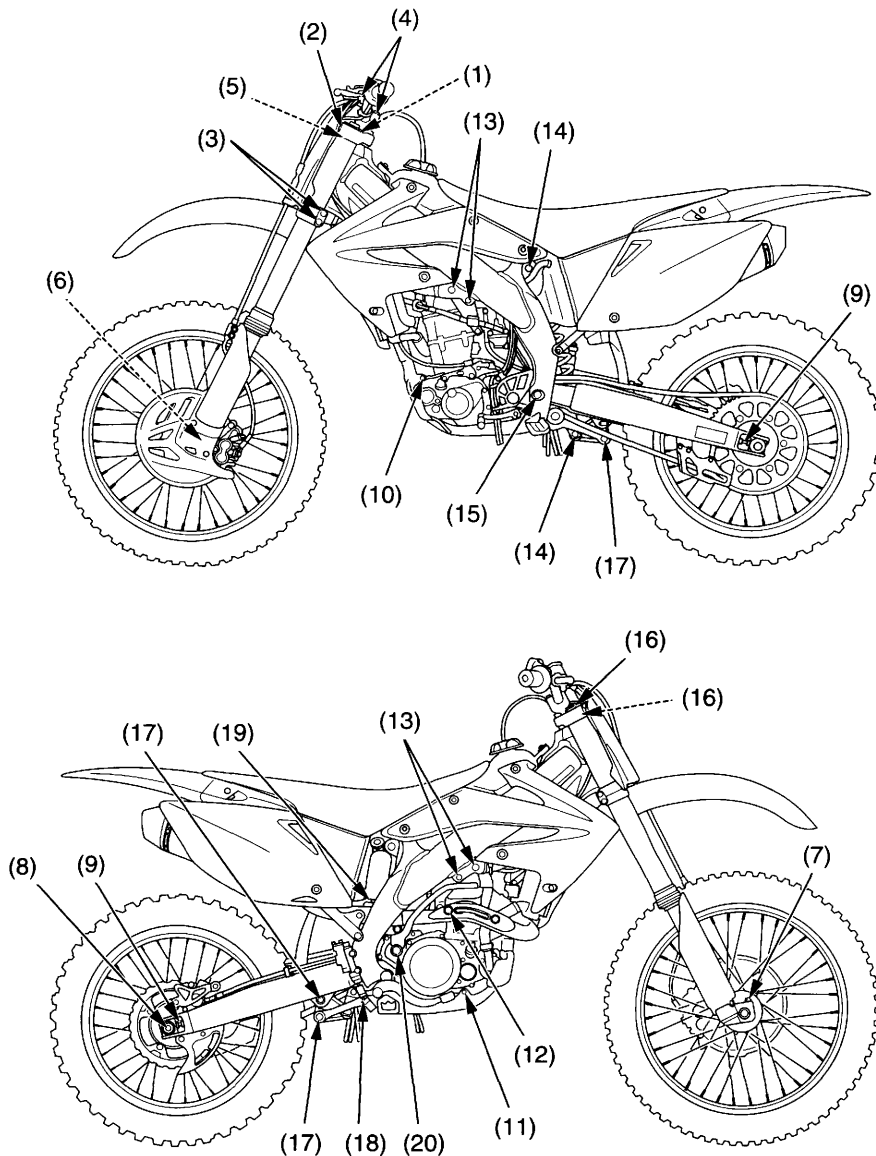

## FRAME

	Item	Torque			Remarks
		N•m	kgf•m	lbf•ft	
1	Steering stem nut	108	11.0	80	
2	Fork bridge upper pinch bolts	22	2.2	16	
3	Fork bridge lower pinch bolts	20	2.0	15	
4	Handlebar upper holder bolts	22	2.2	16	
5	Handlebar lower holder nuts	44	4.5	32	
6	Front axle nut	88	9.0	65	
7	Axle pinch bolts	20	2.0	15	
8	Rear axle nut	128	13.1	94	NOTE 1
9	Chain adjuster lock nuts	27	2.8	20	NOTE 2
10	Front engine mounting nut	64	6.5	47	
11	Lower engine mounting nut	64	6.5	47	
12	Engine hanger nut	54	5.5	40	
13	Engine hanger plate bolts	26	2.7	19	
14	Shock absorber (upper)	44	4.5	32	NOTE 1
	(lower)	44	4.5	32	NOTE 1
15	Swingarm pivot nut	88	9.0	65	NOTE 1
16	Fork (fork damper)	34	3.5	25	
	(fork cap assembly)	30	3.1	22	
17	Rear shock arm nuts				
	(swingarm side)	53	5.4	39	NOTE 1, 7
	(shock link side)	53	5.4	39	NOTE 1, 7
18	Rear shock link nuts				
	(Frame side)	53	5.4	39	NOTE 1, 7
19	Shock spring lock nut	44	4.5	32	
20	Kickstarter arm bolt	38	3.9	28	

### NOTES: 1. U-nut.

2. UBS nut.

3. Apply oil to the threads and flange surface.

4. Apply locking agent to the threads.

5. SH bolt

6. Alock bolt: replace with a new one

7. Apply molybdenum oil to the threads and flange surface.