


Torque Specifications

Frame

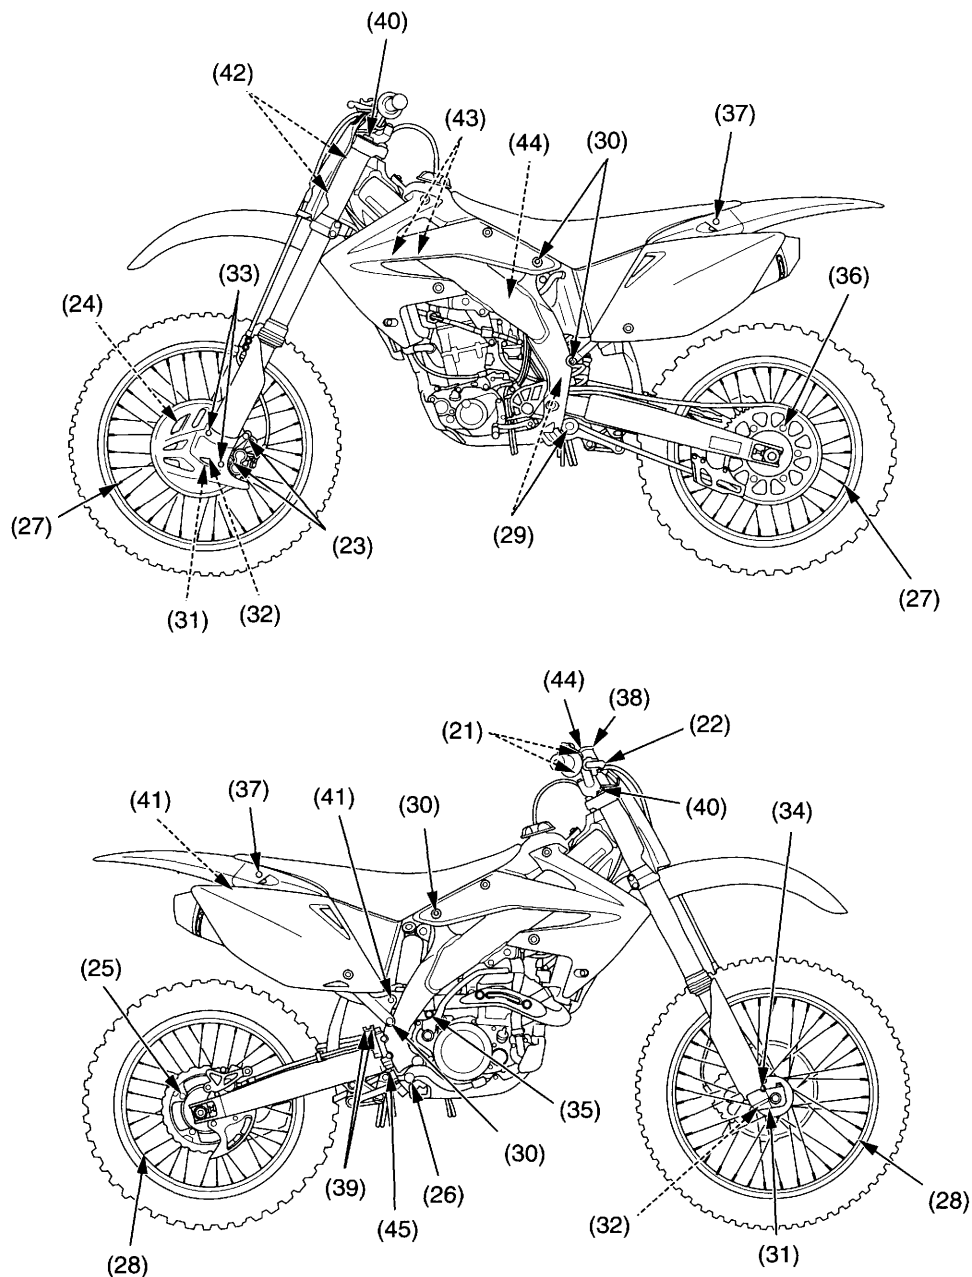

FRAME

Item	Torque			Remarks
	N•m	kgf•m	lbf•ft	
21 Front brake master cylinder holder bolts	9.9	1.0	7.3	
22 Brake hose bolts	34	3.5	25	
23 Front brake caliper mounting bolts	30	3.1	22	NOTE 6
24 Front brake disc nuts	16	1.6	12	NOTE 1
25 Rear brake disc nuts	16	1.6	12	NOTE 1
26 Brake pedal pivot bolt	36	3.7	27	NOTE 6
27 Spokes (front)	3.68	0.4	2.7	
(rear)	3.7	0.4	2.7	
28 Rim locks	12	1.2	9	
29 Drive chain roller (upper)	12	1.2	9	NOTE 5
(lower)	12	1.2	9	NOTE 1
30 Subframe mounting bolts (upper)	30	3.1	22	
(lower)	49	5.0	36	
31 Fork centre bolt	69	7.0	51	NOTE 4
32 Fork centre bolt lock nut	22	2.2	16	
33 Disc cover bolts	13	1.3	10	
34 Fork protector bolts	7	0.7	5.2	NOTE 6
35 Muffler clamp bolt	21	2.1	15	
36 Driven sprocket nuts	32	3.3	24	NOTE 1
37 Seat mounting bolts	26	2.7	19	
38 Front brake reservoir cap screws	1.0	0.1	0.7	
39 Rear brake reservoir cap bolts	1.0	0.1	0.7	
40 Fork air pressure release screw	1.2	0.1	0.9	
41 Muffler mounting bolts (A)	21	2.1	15	
(B)	21	2.1	15	
42 Steering damper mounting bolts	20	2.0	15	NOTE 6
43 Fuel joint mounting bolts	10	1.0	7	
44 Throttle cable adjuster lock nuts	4.0	0.4	3.0	
45 Rear master cylinder push rod lock nut	5.9	0.6	4.4	

- NOTES: 1. U-nut.
 2. UBS nut.
 3. Apply oil to the threads and flange surface.
 4. Apply a locking agent to the threads.
 5. SH bolt
 6. Alock bolt: replace with a new one