


Saddlebag

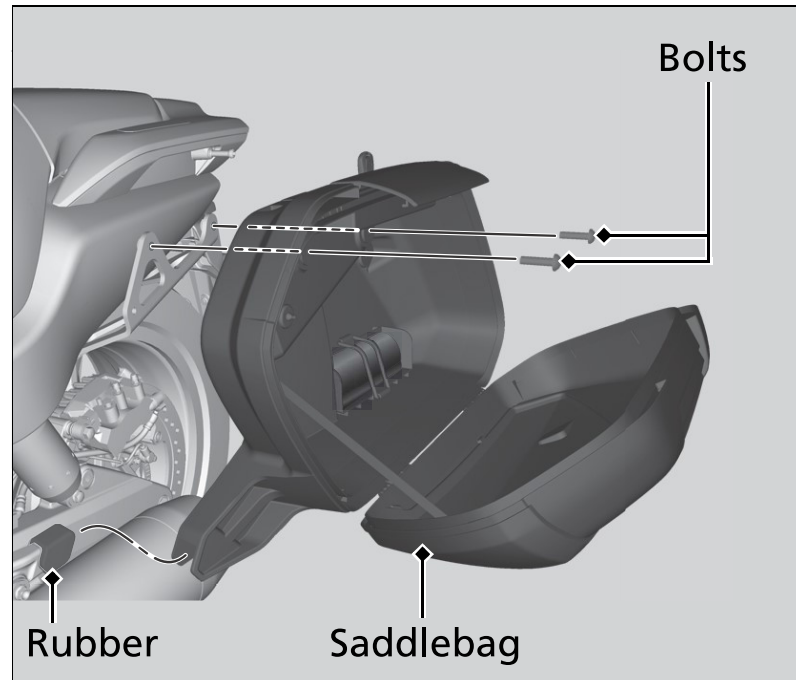

The left saddlebag must be removed to service the rear suspension, and to remove the rear wheel.

The right saddlebag must be removed to service the rear suspension.

The right and left saddlebags can be removed in the same manner.

Removal

1. Open the saddlebag. ► P. 68
2. Remove the bolts.
3. Remove the saddlebag from the rubber on the frame.

Installation

Install the parts in the reverse order of removal.