



Front Turn Signal Bulb

1. Remove the screws A (1) and the screws B (2).
2. Remove the front cover (3).
3. Turn the socket (4) approximately 45° counterclockwise, then pull it out toward you.
4. Slightly press down on the bulb (5) and turn it counterclockwise.
5. Install a new bulb in the reverse order of removal.
 - Use only the amber bulb.

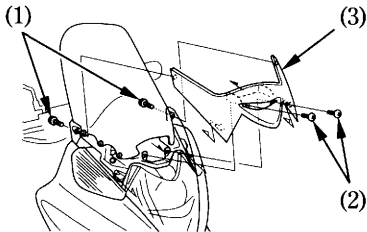

- (1) Screws A
(2) Screws B

(3) Front cover

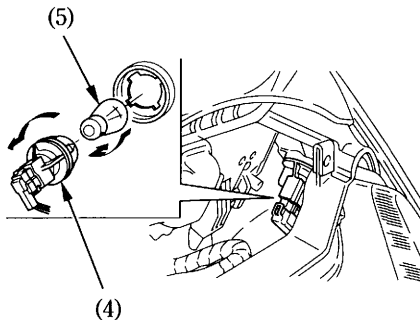

- (4) Socket
(5) Bulb