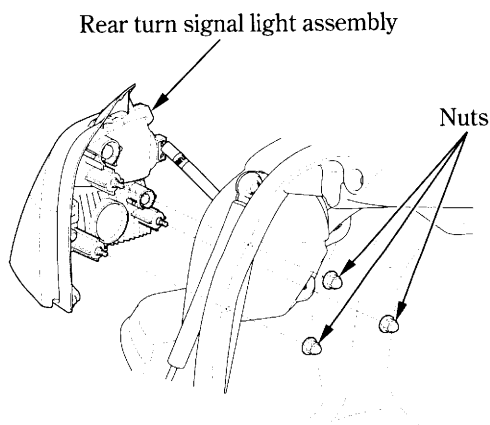

Rear Turn Signal Bulb

1. Open the saddlebag (page 62).
2. Remove the nuts and rear turn signal light assembly.



3. Turn the socket approximately 45° counterclockwise, then pull it out toward you.
4. Pull out the bulb without turning.
5. Install a new bulb in the reverse order of removal.

