


4. Connect the wire harness connector ① and throttle cable ②.

The throttle cable should be routed into the inside of the wire harness.


NOTE: Turn the handle fully in both directions to assure that the brake and throttle cables are not being pulled.

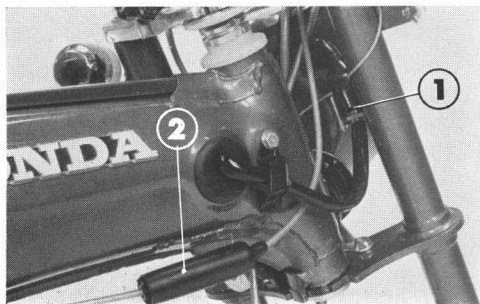

- ① Wire harness
② Throttle cable

5. Raise the seat, install the battery and connect the leads connector ③.

NOTE: When installing the battery, make sure that the battery vent tube is not pinched.

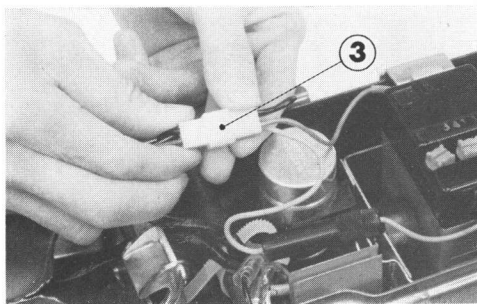

- ③ Leads connector