


Headlight Beam Adjustment

Vertical adjustment is made by pivoting the headlight case on its mounting bolts ①.

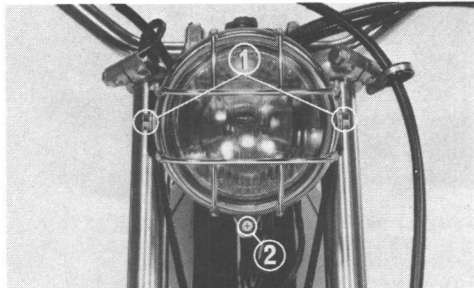


- ① Headlight mounting bolts
- ② Headlight attaching screw

Headlight and Taillight Bulb Replacement

Headlight Bulb Replacement

1. Remove the headlight attaching screw and remove the headlight from the headlight case.
2. Remove the headlight socket ① by pushing down the socket and twisting counterclockwise to unhook from the reflector.

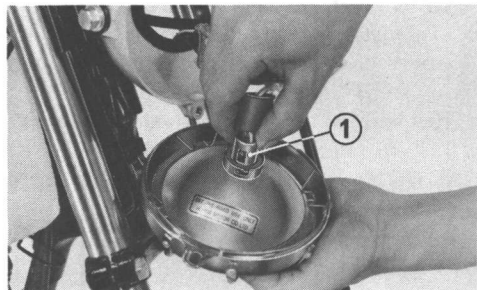

- ① Headlight socket