

Starting Procedure (after Preparation)

To restart a warm engine, follow the procedure for High Air Temperature.

Normal Air Temperature

10° – 35°C (50° – 95°F)

1. Raise the choke knob (1) to the Fully Closed position (A).
2. Open the throttle slightly.
3. Press the starter button and start the engine.

CAUTION:

- * Pressing the electric starter button for more than 5 seconds at a time may cause the starter to overheat and damage the starter. Release the starter button for approximately 10 seconds before pressing it again.
- * The starter motor will operate only when the transmission is in neutral.

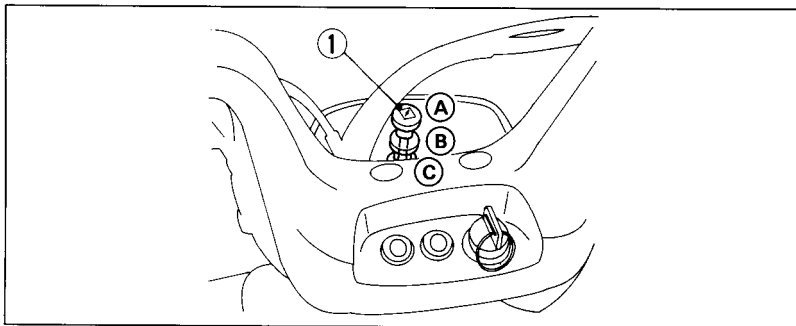


Fig. 3-9

(1) Choke knob

(A) Closed position

(B) Halfway position

(C) Fully open

4. Immediately after the engine starts, release the starter button and push the choke knob to the halfway position (B).
5. About a half minute after the engine starts, push the choke knob down all the way to Fully Open (C).
6. If idling is unstable, open the throttle slightly.