

Drive Chain Slider

Check the drive chain slider at the intervals specified in the Maintenance Schedule.

When the depth of the grooves in the slider reaches 0.12 in (3.0 mm), remove material to lower the height of the center ridge between the grooves to less than 0.12 in (3.0 mm).

Replace the slider when the depth of the grooves reaches 0.24 in (6.0 mm).

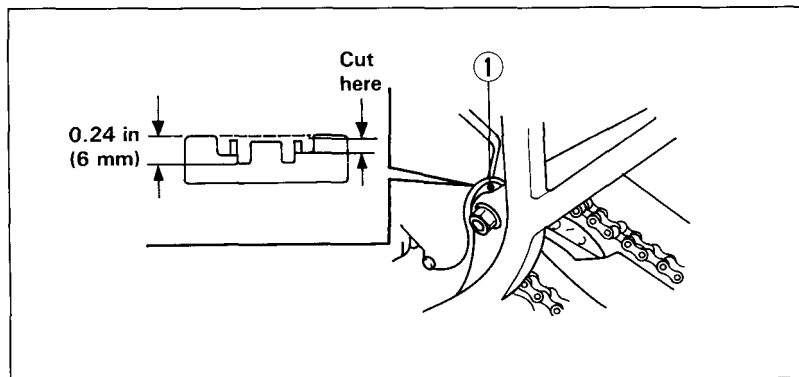


Fig. 4-16

(1) Drive chain slider