


# Throttle

## Throttle Freeplay

Refer to *Safety Precautions* on page 56 .

### RIGHT HANDLEBAR

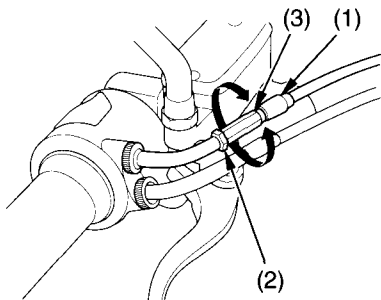

- (1) throttle cable boot
- (2) lock nut
- (3) adjuster

### Inspection

Check freeplay at the throttle grip flange.

Freeplay:

1/16— 1/4 in (2— 6 mm)

If necessary, adjust to the specified range.

### Adjustment

1. Slide the throttle cable boot ( 1 ).
2. Loosen the lock nut ( 2 ).
3. Turn the adjuster ( 3 ).
4. Tighten the lock nut and return the throttle cable boot securely over the adjuster.
5. After adjustment, check for smooth rotation of the throttle grip from fully closed to fully open in all steering positions.