



To prevent scratches to the rear cowl, attach the seat cowl rubber (7) provided before installing the rear seat.

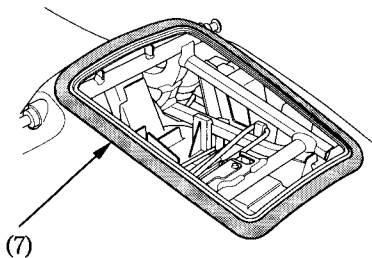

(7) Seat cowl rubber

### Seat cowl panel

Remove the rear seat when using the seat cowl panel (8).

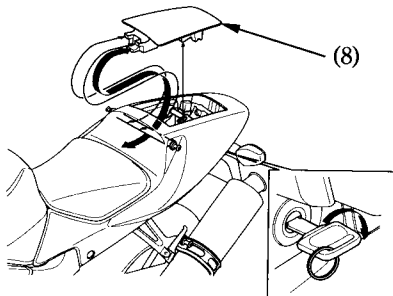

(8) Seat cowl panel