


Spark Plug

Refer to *Safety Precautions* on page 43.

Recommended plugs:

Standard	CR7HSA (NGK) or U22FSR-U (NIPPONDENSO)
For cold climate (below 5° C, 41° F)	CR6HSA (NGK) or U20FSR-U (NIPPONDENSO)
For extended high speed riding	CR8HSA (NGK) or U24FSR-U (NIPPONDENSO)

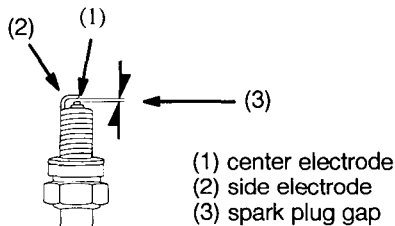

1. Clean any dirt from around the spark plug base.
2. Disconnect the spark plug cap.
3. Remove the spark plug with a plug wrench.
4. Inspect the spark plug electrodes for wear. The center electrode (1) should have square edges. The side electrode (2) should not be eroded. The insulator should not be cracked or chipped.