





Remove the circlip and four nuts and remove the final driven sprocket from the axle.

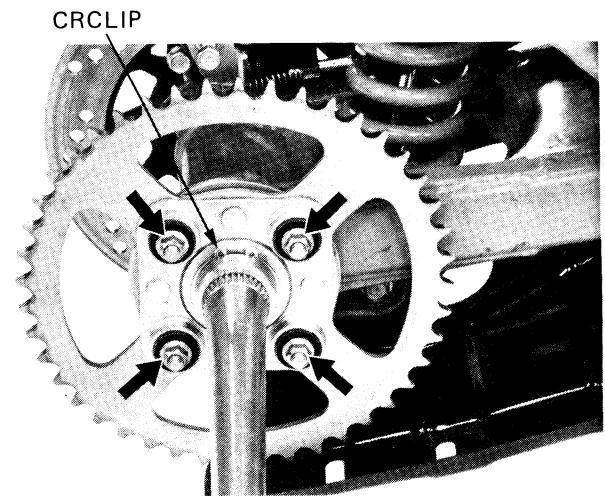

Remove the two bolts and brake caliper from the swingarm.

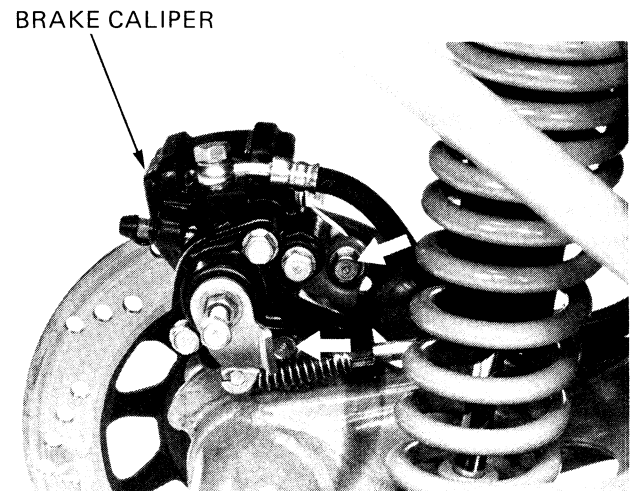

Remove the three bolts and rear brake disc from the axle.

