





Install the brake disc and tighten the bolts to the specified torque.

**TORQUE: 21-27 N·m (2.1-2.7 kg-m,
15-20 ft-lb)**

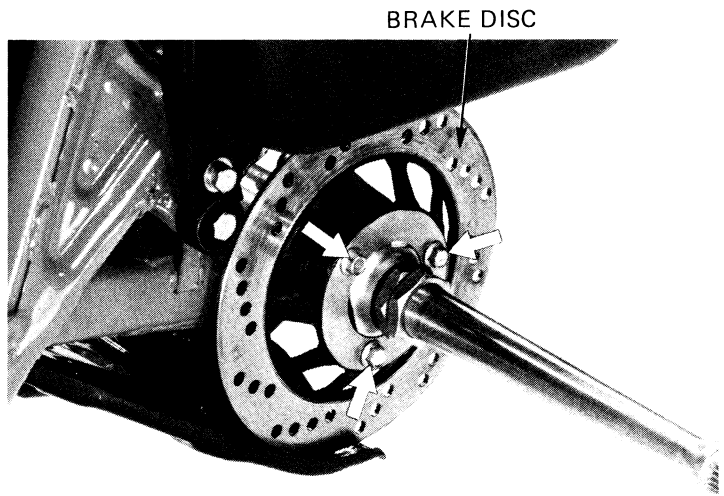

Install the brake caliper on the swingarm and tighten the bolts to the specified torque.

**TORQUE: 18-25 N·m (1.8-2.5 kg-m,
13-18 ft-lb)**

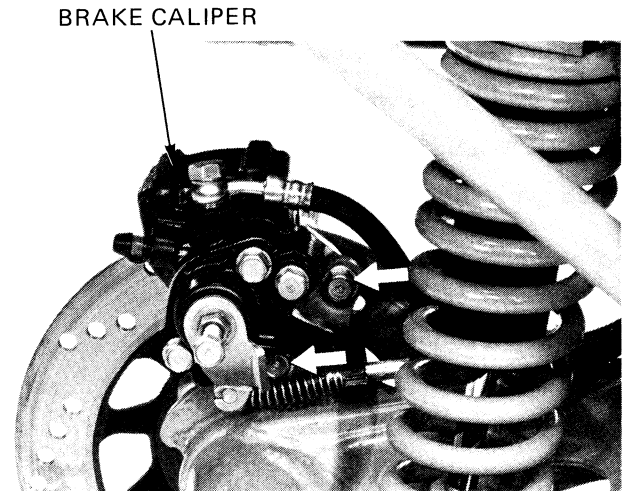

Install the final driven sprocket.

**TORQUE: 21-27 N·m (2.1-2.7 kg-m,
15-20 ft-lb)**

Install the snap ring with the chamfered end toward the sprocket with snap ring pliers.

