13

13. FRONT FENDER/SEAT/REAR FENDER/EXHAUST MUFFLER

FRONT FENDER 13–1
SEAT/REAR FENDER 13–2
EXHAUST PIPE 13–3


FRONT FENDER

REMOVAL

Remove the four fender mount bolts and the front fender.

INSTALLATION

Install the removed parts in the reverse order of removal.

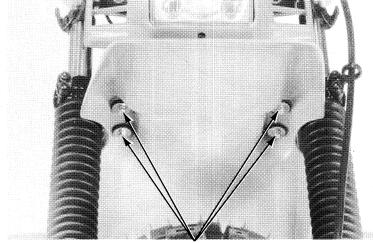

FRONT FENDER MOUNT BOLTS

