


REMOVAL

Remove the seat/rear fender.


Remove the exhaust pipe joint nuts.

Loosen the exhaust pipe clamp bolts.

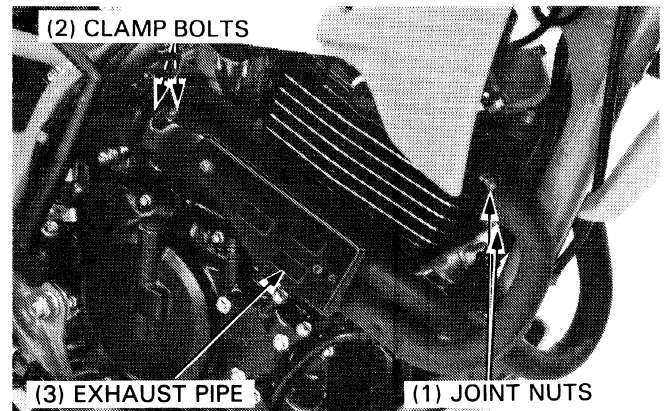

Remove the exhaust muffler mount bolts and remove the muffler and exhaust pipe.

Check the gasket and pipe seal for wear or damage and replace them if necessary.

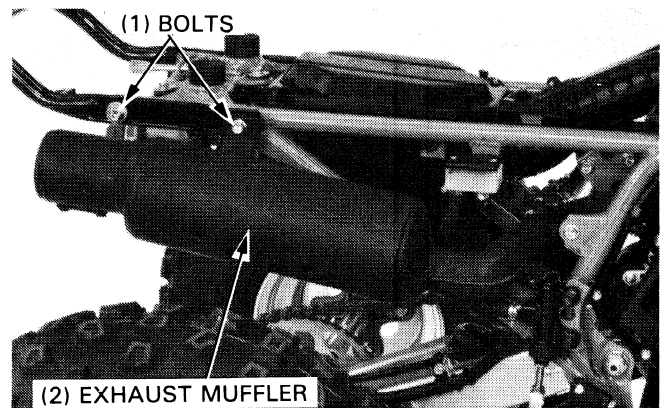

INSTALLATION

The installation sequence is essentially the reverse of removal.

NOTE

- Tighten the exhaust joint nuts first, then tighten the other bolts.
- Align the tab of the clamp with the groove of the muffler.
- After installing, make sure that there are no exhaust leaks.