



2. Remove the windscreen by removing the screws, and the washers A.

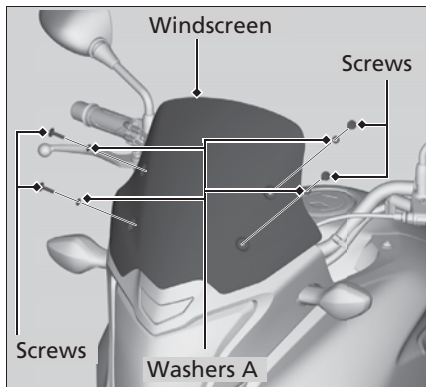

3. Remove the nuts and the washers B.

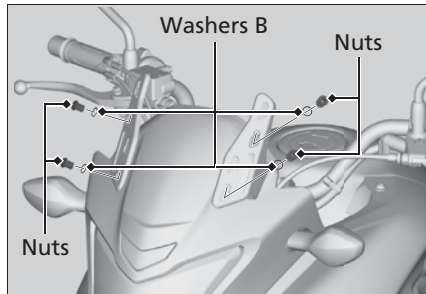

4. Set the all nuts and the washers B to the low position holes or high position holes.

