


For your protection, always wear your helmet while riding. Read the owner's manual carefully.

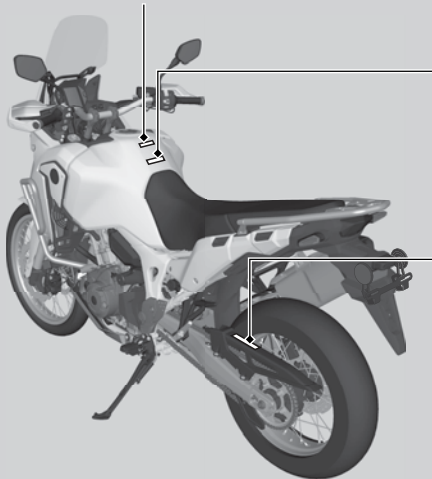

## ⚠ WARNING

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.

### CRF1000A/D

TIRE INFORMATION				DRIVE CHAIN	
Cold tire pressures		kPa	kgf/cm <sup>2</sup>	psi	Keep chain adjusted and lubricated. 40 mm (1 5/8 in.) Freeplay
Up to maximum weight capacity	Front	225	2,25	33	
	Rear	280	2,80	41	
Up to 90kg(200lbs) load	Front	200	2,00	29	
	Rear	250	2,50	35	
Tire size		Front 90/90-21M/C 54H			
		Rear 150/70R18M/C 70H			
Min. recommend tire center tread depth,		Front 1,5mm (0,06in.)			Read owner's manual.
		Rear 2,0mm (0,08in.)			
Maximum weight capacity	198kg(437lbs)				

### CRF1000A II/D II

TIRE INFORMATION				DRIVE CHAIN	
Cold tire pressures		kPa	kgf/cm <sup>2</sup>	psi	Keep chain adjusted and lubricated. 50 mm (2 in.) Freeplay
Up to maximum weight capacity	Front	225	2,25	33	
	Rear	280	2,80	41	
Up to 90kg(200lbs) load	Front	225	2,25	33	
	Rear	280	2,80	41	
Tire size		Front 90/90-21M/C 54H			
		Rear 150/70R18M/C 70H			
Min. recommend tire center tread depth,		Front 1,5mm (0,06in.)			Read owner's manual.
		Rear 2,0mm (0,08in.)			
Maximum weight capacity	180kg(397lbs)				