


Battery

Installation

1. Reinstall the battery (1) in the reverse order of removal. Be sure to connect the positive (+) terminal (2) first, then the negative (-) terminal (3).
2. Tighten the positive (+) and negative (-) terminal bolts (4) to the specified torque: 1.5 lbf·ft (2.0 N·m, 0.2 kgf·m)
3. Install the positive terminal cover (5).
4. Install the battery band (6).

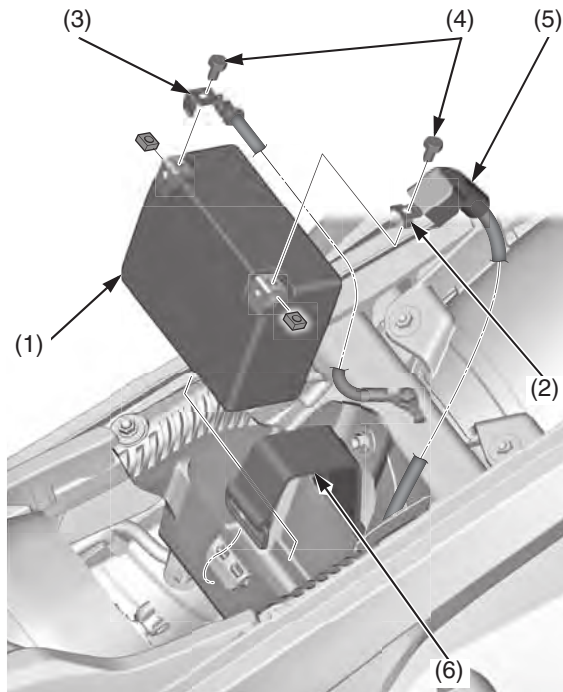

- | | |
|---------------------------|-----------------------------|
| (1) battery | (4) terminal bolts |
| (2) positive (+) terminal | (5) positive terminal cover |
| (3) negative (-) terminal | (6) battery band |

Battery Charging

Be sure to read the information that came with your battery charger and follow the instructions on the battery. Improper charging may damage the battery.

We recommend using a charger recommended by your lithium-ion (li-ion) battery manufacturer which can be purchased from your dealer. These units can be left connected for long periods without risking damage to the battery. However, the lithium-ion (li-ion) battery may degrade if stored with a charger connected. Do not intentionally leave the charger connected longer than the time period recommended in the charger's instructions.

Using an existing lead-acid battery charger or battery charger that is not recommended, will damage the electrical circuits within the lithium-ion (li-ion) battery.