


6. Release the tabs, then open the battery cover.
7. Remove the battery taking care not to drop the terminal nuts.

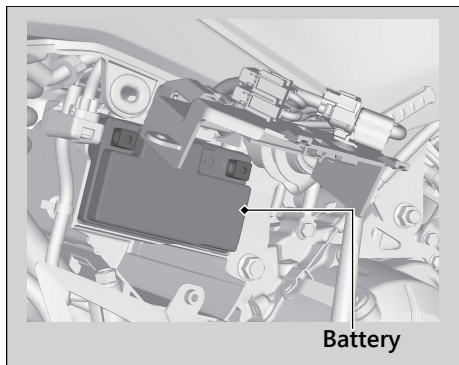

Installation

Install the parts in the reverse order of removal. Always connect the positive \oplus terminal first. Make sure that bolts and nuts are tight.

For proper handling of the battery, see "Maintenance Fundamentals." ► P. 38
 "Battery Goes Dead." ► P. 87