

Removal

1. Remove the centre lower cowl. ► P. 50
2. Remove the clips. ► P. 51
3. Remove the bolts.
4. Release the tabs A and tabs B.
► Carefully release the tabs.
5. Remove the right cowl by releasing the grommet from the prong on the main pipe front cover.
6. Remove the turn signal light wires from the guides and disconnect the connectors.


Installation

Install the parts in the reverse order of removal.

Harness Band Clip

Removal

Pull the harness band clip while pressing both sides of the anchor.

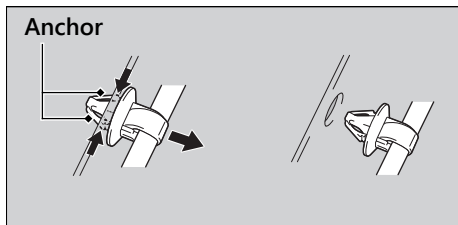

Installation

Install the harness band clip until it seats properly.