

# Rear Final Gear Oil

---

6. Fill the rear final gear case with the recommended oil.


**4.2 US oz (125 cm<sup>3</sup>)**

Make sure the oil level is at the lower edge of the oil fill inspection hole (5).

7. Coat a new O-ring with grease and install it into the fill cap groove and tighten it to the specified torque:

**9 lbf·ft (12 N·m, 1.2 kgf·m)**

## REAR

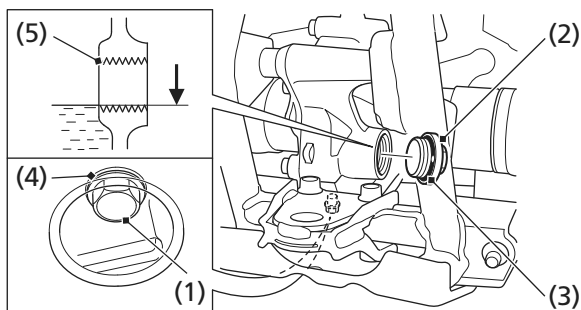

(1) oil drain bolt

(2) oil fill cap

(3) O-ring

(4) sealing washer

(5) oil fill inspection hole