


## If You Have a Flat Tire

### Wheel Removal (VT750C ABS)

1. Park your motorcycle on a firm, level surface.
2. Raise the rear wheel off the ground by placing a support block under the engine.
3. Loosen the axle holding bolt (1).
4. While holding the other end of the rear axle shaft (2) with a wrench, remove the rear axle nut (3).
5. Remove the rear brake bracket bolt (4) and bolt (5).
6. Pull the rear axle shaft out.
7. Remove the rear brake bracket (6), washer and side collar.

### RIGHT REAR

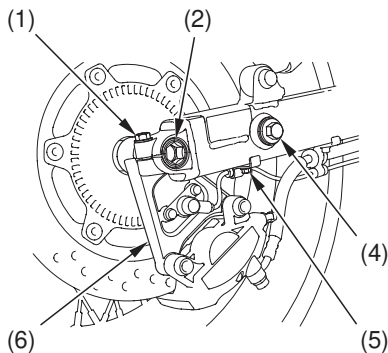

- (1) axle holding bolt
- (2) rear axle shaft
- (3) rear axle nut
- (4) brake bracket bolt
- (5) bolt
- (6) brake bracket

(cont'd)