


Secondary Master Cylinder Removal/Installation

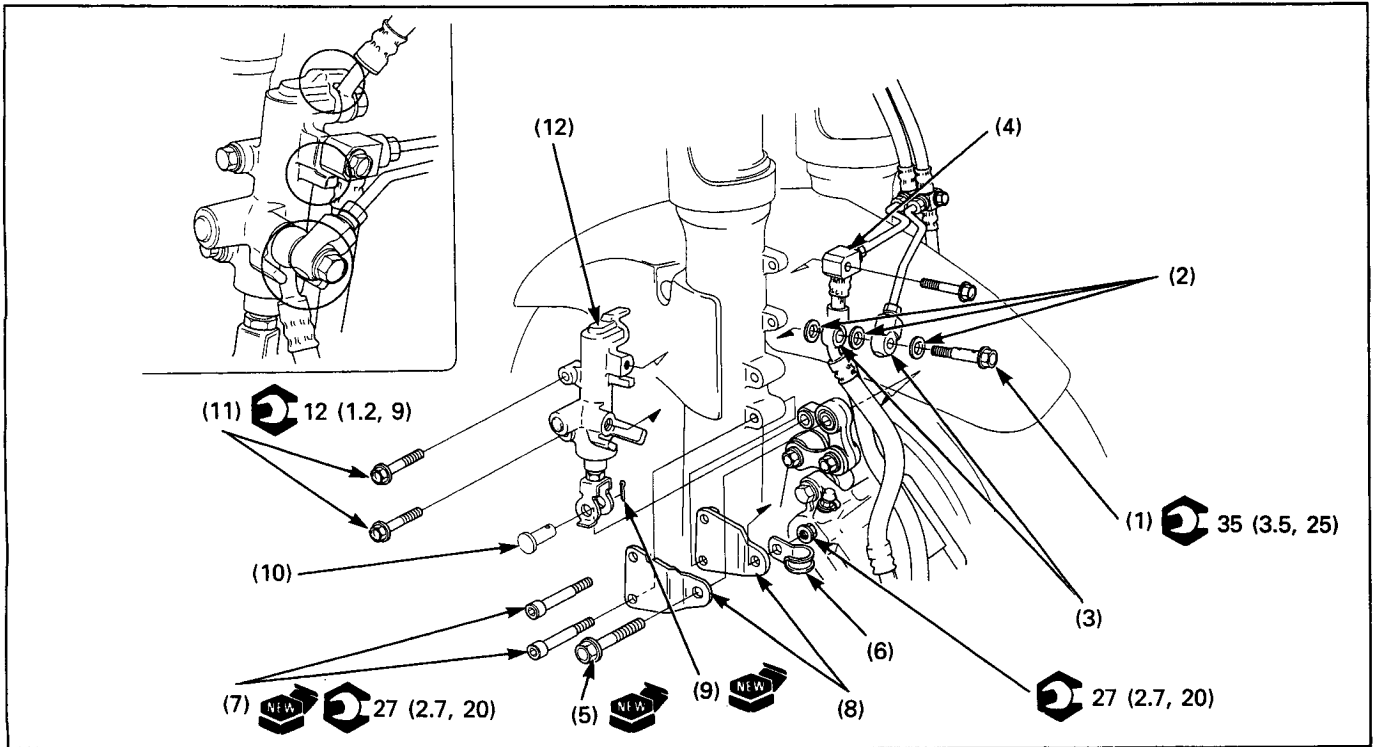

CAUTION

- Avoid spilling brake fluid on painted, plastic, or rubber parts. Place a rag over these parts whenever the system is serviced.
- When removing the oil bolt, cover the end of the brake hose to prevent contamination.
- Do not allow foreign material to enter the system.

Requisite Service

- Brake system air bleeding (page 13-25)

Procedure	Q'ty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Oil bolt	1	
(2) Sealing washer	3	
(3) Brake hose eyelet joint/brake pipe joint	1/1	
(4) Brake pipe joint	1	
(5) Brake link bolt/nut	1/1	
(6) Brake hose clamp	1	
(7) Brake link bracket bolt	2	
(8) Brake link bracket	2	
(9) Cotter pin	1	
(10) Joint pin	1	
(11) Secondary master cylinder mounting bolt	2	
(12) Secondary master cylinder	1	