


Unit: mm (in)

Wheels/Tires		Item	Standard	Service Limit
		Minimum tire tread depth (FR)	_____	1.5 (0.06)
		(RR)	_____	2.0 (0.08)
Cold tire pressure	Driver only	(FR)	250 kPa (2.5 kg/cm ² , 36 psi)	_____
	Driver only	(RR)	290 kPa (2.9 kg/cm ² , 42 psi)	_____
	Driver and passenger	(FR)	250 kPa (2.5 kg/cm ² , 36 psi)	_____
	Driver and passenger	(RR)	290 kPa (2.9 kg/cm ² , 42 psi)	_____
		Front and rear axle runout	_____	0.2 (0.01)
		Front and rear wheel rim runout (Radial)	_____	2.0 (0.08)
		(Axial)	_____	2.0 (0.08)
		Wheel balance weight (Front)	_____	60 g (2.1 oz)
		(Rear)	_____	60 g (2.1 oz)
		Drive chain slack	15-25 (0.6-1.0)	_____
		Drive chain size/link (DID)	DID50ZV/114	_____
		(RK)	RK50LFO/114	_____

Front Suspension		
Fork spring free length	446.3 (17.57)	437.4 (17.22)
Fork spring direction	Tapered wound coil facing down	_____
Fork tube runout	_____	0.2 (0.01)
Recommended fork oil	Fork fluid	_____
Fork oil level	173 (6.8)	_____
Fork oil capacity	418 cm ³ (14.1 US oz, 11.8 Imp oz)	_____
Steering bearing preload	1.1-1.6 kg (2.43-3.53 lb)	_____

Rear Suspension		
Damper compressed gas	Nitrogen	_____
Damper drilling point	13 (0.5)	_____

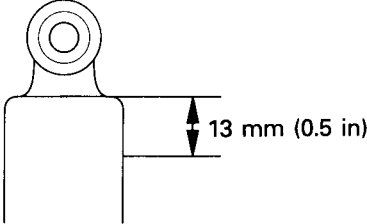

13 mm (0.5 in)