


REAR MASTER CYLINDER

NOTICE


Spilled fluid can damage painted, plastic, or rubber parts. Place a shop towel over these parts whenever the system is serviced.

REMOVAL

Remove the bolts and exhaust pipe protector.

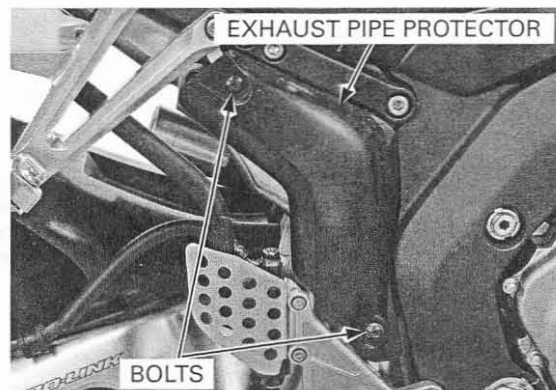

Drain the rear hydraulic system (page 16-7).
Remove the bolts and passenger peg bracket.

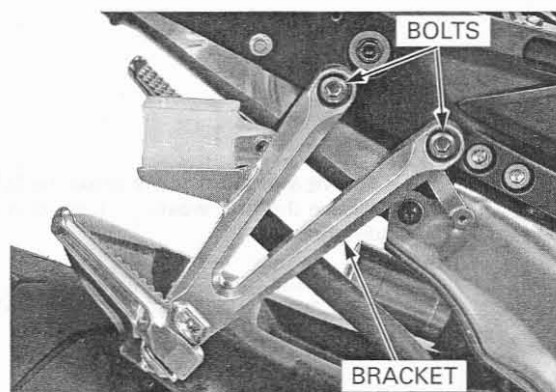

Remove the bolt and rear master cylinder reservoir.

