


## SPEEDOMETER

### BULB REPLACEMENT

Remove the front handlebar cover (page 3-6).  
 Pull out the bulb socket from the speedometer.  
 Remove the bulb from the socket.  
 Installation is in the reverse order of removal.

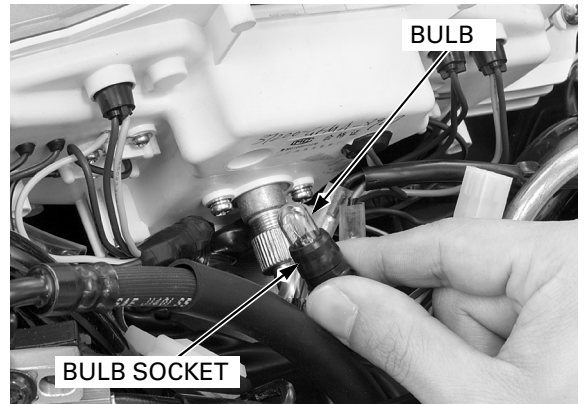

### REMOVAL/INSTALLATION

Remove the rear handlebar cover (page 3-7).  
 Disconnect the left and right handlebar switch connectors.  
 Remove the three screws and speedometer.  
 Installation is in the reverse order of removal.

*Route the wire harness properly (page 1-17).*

