


5. Remove the front axle nut.
6. Loosen the left axle pinch bolts.
7. Support your motorcycle securely and raise the front wheel off the ground using a maintenance stand or a hoist.



8. Loosen the right axle pinch bolts.

9. On the right side, loosen and withdraw the front axle shaft, and remove the side collars and wheel.

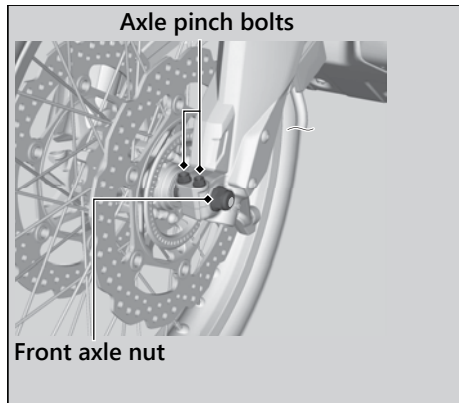